


TM.ONTEC APN 31P M ST



Catalog number	TM-AN.31P.ST03W
Duration time	3 h
Operating mode	M
Version	ST – for button test
Colour	RAL9003
Visibility	32 m
Luminance	>200 cd/m ²
Maximum light power (the luminaire can power the light source with a different power)	2.5 W
Active power	6.8 W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Dimming mode	no
Temperature range	10-40 °C
Material	PC
Insulation class	2
IP	IP20
IK	IK06
Battery	LiFePO ₄ /C 6.4V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
View fitting	one-sided or double-sided
Insulation	II

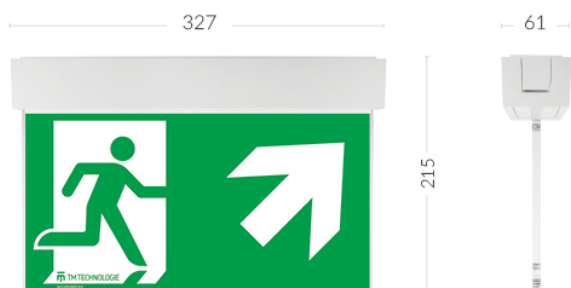