


TM.PRIMO AP 30D 180 M DATA 2



Catalog number	TM-AP.30D.BD03M
Duration time	3 h
Operating mode	M
Version	DD - DATA2
Colour	M – Mirror
Visibility	30 m
Luminance	>500 cd/m²
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	6.3 W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Dimming mode	yes
Temperature range	5-40 °C
Material	metal
Insulation class	1
IP	IP20
IK	IK07
Battery	LiFePO4/C 6.4V 1.5Ah
Material	metal
finish	- mirror stainless steel - black steel powder coated: RAL 9003 white RAL 9005 black
Application	evacuation route direction (escape sign)
insulation class	I
Luminance	> 300 cd/m²

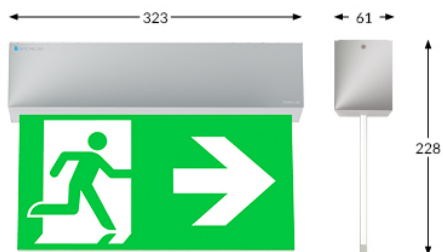