


ITECH W2 305 M DALI



Catalog number	TM-IT.W2DAM360W
Application	lighting of the final exit / fire-protection devices
Duration time	3 h
Operating mode	M
Version	DALI
Colour	RAL9003
Luminous flux	470 lm
Maximum light power (the luminaire can power the light source with a different power)	4.5 W
Active power	6 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	10-40 °C
Material	PC
Insulation class	2
IP	IP65
IK	IK06
Battery	LiFePO4/C 6.4V 3.0Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Type - DALI	A - maintained, controllable, dimmable
Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838



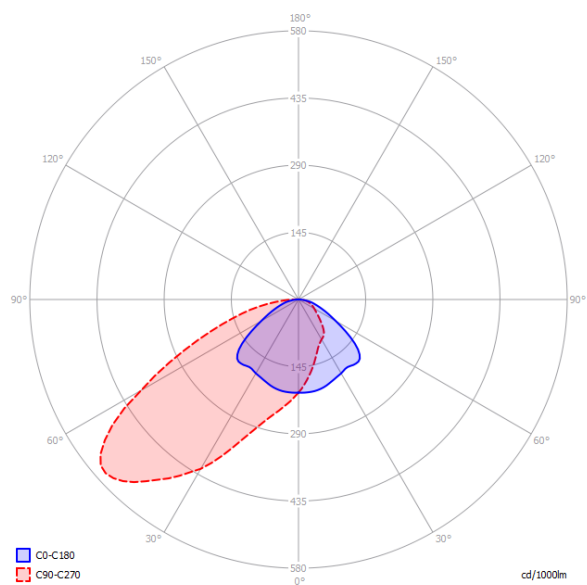

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	4,1	9,6
3,0	4,2	10,0
4,0	4,4	10,8
5,0	4,5	11,1
6,0	4,3	11,0
7,0		
8,0		
9,0		
10,0		

