


# TM.ONTEC C M1


## 60 NM DATA 2

### RADIO

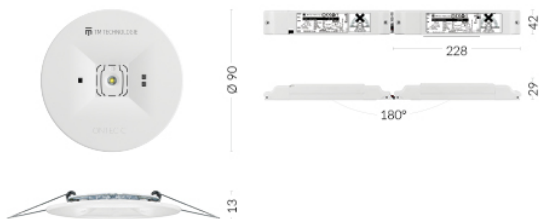

|                                                                                       |                                                                                                                                                       |
|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Catalog number                                                                        | TM-OC.M1DRN600W                                                                                                                                       |
| Application                                                                           | anti-panic lighting                                                                                                                                   |
| Duration time                                                                         | 1 h                                                                                                                                                   |
| Operating mode                                                                        | NM                                                                                                                                                    |
| Version                                                                               | DD - DATA2                                                                                                                                            |
| Colour                                                                                | RAL9003                                                                                                                                               |
| Luminous flux                                                                         | 338 lm                                                                                                                                                |
| Maximum light power (the luminaire can power the light source with a different power) | 3 W                                                                                                                                                   |
| Active power                                                                          | 1.2 W                                                                                                                                                 |
| Power supply                                                                          | 210+250 V AC 50+60 Hz                                                                                                                                 |
| Power supply CB                                                                       | 186+254 V DC                                                                                                                                          |
| Dimming mode                                                                          | no                                                                                                                                                    |
| Temperature range                                                                     | 10-35 °C                                                                                                                                              |
| Material                                                                              | PC                                                                                                                                                    |
| Insulation class                                                                      | 2                                                                                                                                                     |
| IP                                                                                    | IP20                                                                                                                                                  |
| IK                                                                                    | IK03                                                                                                                                                  |
| Battery                                                                               | LiFePO4/C 3.2V 1.5Ah                                                                                                                                  |
| Warranty                                                                              | 24 months - ST<br>36 months - AT<br>60 months - DATA, CB                                                                                              |
| Standards                                                                             | PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838 |



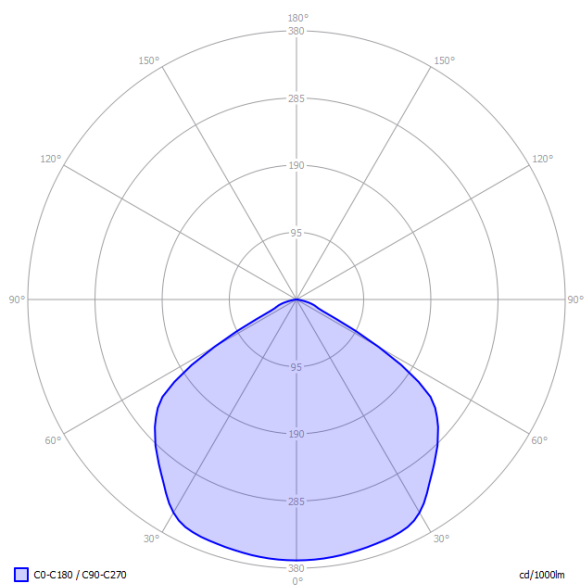

## PHOTOMETRY [m]

### Ceiling height

2,5  
3,0  
4,0  
5,0  
6,0  
7,0  
8,0  
9,0  
10,0

### Distance wall - fitting

3,5 - 1h/CB | 3,0 - 3 h  
4,0 - 1h/CB | 3,5 - 3 h  
5,0 - 1h/CB | 4,0 - 3h  
5,5 - 1h/CB | 4,5 - 3h  
5,5 - 1h/CB | 4,0 - 3h  
6,0 - 1h/CB | 3,5 - 3h  
6,0 - 1 h/CB | 2,5 - 3h  
5,5 - 1h/CB | 2,5 - 3h  
5,0 - 1 h/CB | 2,0 - 3h

### Distance fitting - fitting

8,0 - 1h/CB | 7,5 - 3h  
9,0 - 1h/CB | 8,5 - 3h  
11,0 - 1h/CB | 10,0 - 3h  
13,0 - 1h/CB | 11,5 - 3h  
15,0 - 1h/CB | 13,0 - 3h  
16,5 - 1h/CB | 14,0 - 3h  
18,0 - 1h/CB | 15,0 - 3h  
19,0 - 1h/CB | 15,0 - 3h  
20,0 - 1h/CB | 15,0 - 3h

