



# TM.ONTEC D M1 60 NM ST



|                                                                                       |                                                                                                                                                       |
|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Catalog number                                                                        | TM-OD.M1STN600R                                                                                                                                       |
| Application                                                                           | anti-panic lighting                                                                                                                                   |
| Duration time                                                                         | 1 h                                                                                                                                                   |
| Operating mode                                                                        | NM                                                                                                                                                    |
| Version                                                                               | ST – for button test                                                                                                                                  |
| Colour                                                                                | RAL4010                                                                                                                                               |
| Luminous flux                                                                         | 338 lm                                                                                                                                                |
| Maximum light power (the luminaire can power the light source with a different power) | 3 W                                                                                                                                                   |
| Active power                                                                          | 1.2 W                                                                                                                                                 |
| Power supply                                                                          | 210+250 V AC 50+60 Hz                                                                                                                                 |
| Power supply CB                                                                       | 186+254 V DC                                                                                                                                          |
| Dimming mode                                                                          | no                                                                                                                                                    |
| Temperature range                                                                     | 10-35 °C                                                                                                                                              |
| Material                                                                              | PC                                                                                                                                                    |
| Insulation class                                                                      | 2                                                                                                                                                     |
| IP                                                                                    | IP20                                                                                                                                                  |
| IK                                                                                    | IK03                                                                                                                                                  |
| Battery                                                                               | LiFePO4/C 3.2V 1.5Ah                                                                                                                                  |
| Warranty                                                                              | 24 months - ST<br>36 months - AT<br>60 months - DATA, CB                                                                                              |
| Standards                                                                             | PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838 |

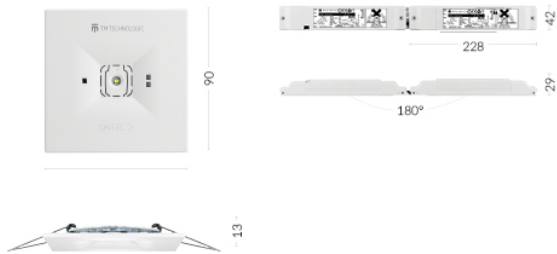

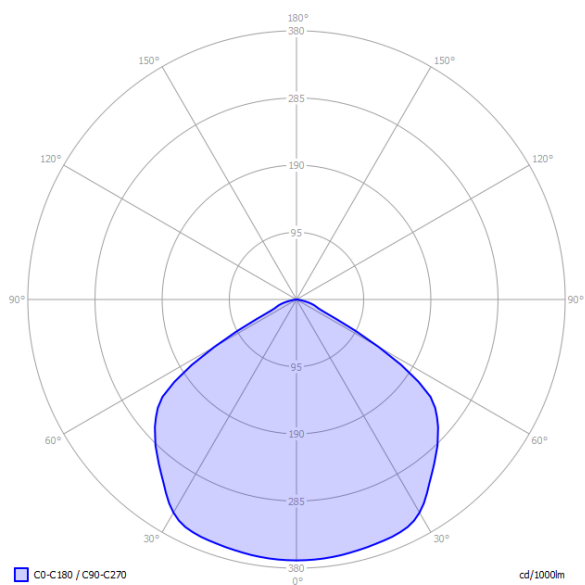

## PHOTOMETRY [m]

| Ceiling height | Distance wall - fitting | Distance fitting - fitting |
|----------------|-------------------------|----------------------------|
| 2,5            | 3,5 - 1h/CB   3,0 - 3 h | 8,0 - 1h/CB   7,5 - 3h     |
| 3,0            | 4,0 - 1h/CB   3,5 - 3 h | 9,0 - 1h/CB   8,5 - 3h     |
| 4,0            | 5,0 - 1h/CB   4,0 - 3h  | 11,0 - 1h/CB   10,0 - 3h   |
| 5,0            | 5,5 - 1h/CB   4,5 - 3h  | 13,0 - 1h/CB   11,5 - 3h   |
| 6,0            | 5,5 - 1h/CB   4,0 - 3h  | 15,0 - 1h/CB   13,0 - 3h   |
| 7,0            | 6,0 - 1h/CB   3,5 - 3h  | 16,5 - 1h/CB   14,0 - 3h   |
| 8,0            | 6,0 - 1 h/CB   2,5 - 3h | 18,0 - 1h/CB   15,0 - 3h   |
| 9,0            | 5,5 - 1h/CB   2,5 - 3h  | 19,0 - 1h/CB   15,0 - 3h   |
| 10,0           | 5,0 - 1 h/CB   2,0 - 3h | 20,0 - 1h/CB   15,0 - 3h   |

