


ONTEC S C1 302 M DALI COLD



Catalog number	TM-OS.C1DAM36CW
Application	escape route lighting
Duration time	3 h
Operating mode	M
Version	DALI
Colour	RAL9003
Luminous flux	225 lm
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	6.5 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	-15-40 °C
Material	PC
Insulation class	2
IP	IP65
IK	IK08
Battery	LiFePO4/C 6.4V 3.0Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
cold	yes
Type - DALI	A - maintained, controllable, dimmable



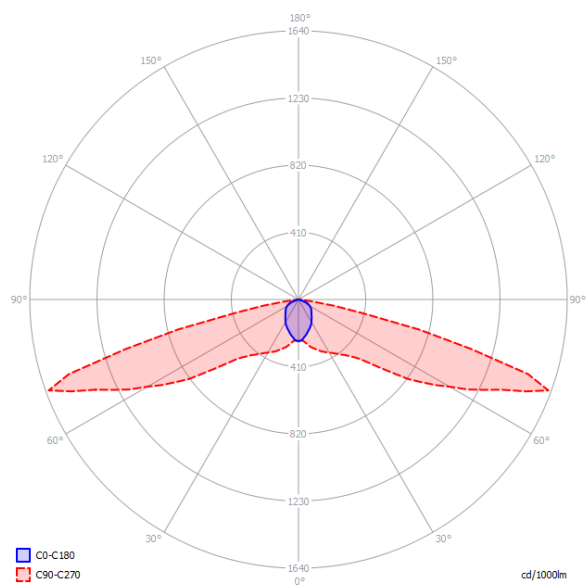

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	8,0	18,2
3,0	8,8	20,5
4,0	9,4	24,2
5,0	8,6	26,0
6,0	5,3	23,5
7,0	4,2	21,5
8,0	3,4	18,0
9,0		
10,0		

