


ONTEC S C2

105 M DALI



Catalog number	TM-OS.C2DAM160W
Application	escape route lighting
Duration time	1 h
Operating mode	M
Version	DALI
Colour	RAL9003
Luminous flux	453 lm
Maximum light power (the luminaire can power the light source with a different power)	4.5 W
Active power	6.8 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	10-40 °C
Material	PC
Insulation class	2
IP	IP65
IK	IK08
Battery	LiFePO4/C 6.4V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Type - DALI	A - maintained, controllable, dimmable

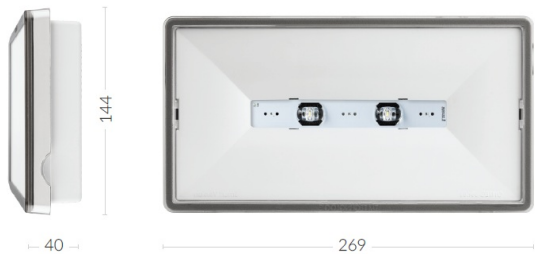



PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	9,0	20,2
3,0	10,2	23,0
4,0	12,3	28,2
5,0	13,7	32,7
6,0	13,2	36,0
7,0	12,6	37,5
8,0	10,1	34,0
9,0	6,8	33,0
10,0	5,4	31,0

