


ONTEC S M1 180 M ST



Catalog number	TM-OS.M1STM860W
Application	anti-panic lighting
Duration time	3 h
Operating mode	M
Version	ST – for button test
Colour	RAL9003
Luminous flux	150 lm
Maximum light power (the luminaire can power the light source with a different power)	2.5 W
Active power	3.3 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	10-40 °C
Material	PC
Insulation class	2
IP	IP65
IK	IK08
Battery	LiFePO4/C 3.2V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838



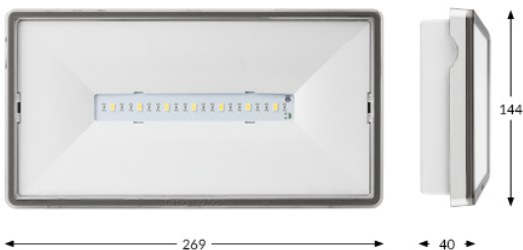

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	3,0	8,3
3,0	3,2	9,0
4,0	3,4	10,3
5,0	3,6	11,0
6,0	3,6	11,8
7,0	3,4	12,2
8,0	3,0	12,0
9,0	2,6	11,7
10,0	2,4	11,5

Distance wall - fitting

Distance fitting - fitting

2,5

3,0

8,33,03,2

9,0

4.03.410.3

5,0

3,611.06.0

3.6

11.87.03.412.280301209.02.611.710024115