


TM.PRIMO P F1 CBA



Catalog number	TM-P0.F1.CBA1M
Application	escape route lighting
Duration time	-
Operating mode	-
Version	for central battery
Colour	M – Mirror
Luminous flux	462* lm
Maximum light power (the luminaire can power the light source with a different power)	4.5 W
Active power	6.5 W
Power supply	210÷250 V AC
Power supply CB	186÷254 V DC
Dimming mode	yes
Temperature range	-10-40 °C
Material	metal
Insulation class	1
IP	IP20
IK	IK03
finish	mirror stainless steel black steel powder coated: RAL 9003 - white RAL 9005 - black RAL 9006 gray
insulation class	I
operating mode	M - maintained NM - non-maintained
Application	escape route lighting / antipanic lighting option: additional lens for anti panic (S lens), or emergency escape lighting (C & F lens)
Material	metal

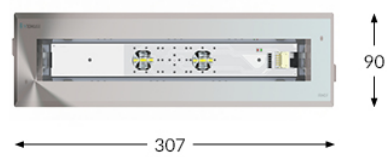