


TM.PRIMO R C1 60 NM AT



Catalog number	TM-PR.C1ATN600W
Application	escape route lighting
Duration time	1 h
Operating mode	NM
Version	AT - auto-test / self-test
Colour	RAL9003
Luminous flux	289 lm
Maximum light power (the luminaire can power the light source with a different power)	2.5 W
Active power	* W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	metal
Insulation class	1
IP	IP20
IK	IK05
Battery	LiFePO4/C 3.2V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Material	metal

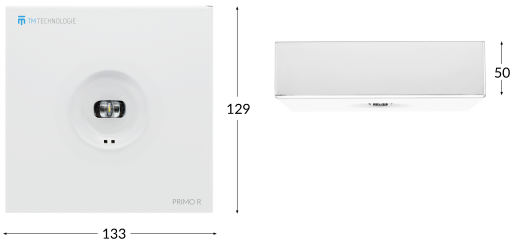