


# TM.PRIMO R C1 CBA



|                                                                                       |                                                          |
|---------------------------------------------------------------------------------------|----------------------------------------------------------|
| Catalog number                                                                        | TM-PR.C1CBA000W                                          |
| Application                                                                           | escape route lighting                                    |
| Duration time                                                                         | -                                                        |
| Operating mode                                                                        | -                                                        |
| Version                                                                               | for central battery                                      |
| Colour                                                                                | RAL9003                                                  |
| Luminous flux                                                                         | 289 lm                                                   |
| Maximum light power (the luminaire can power the light source with a different power) | 2.5 W                                                    |
| Active power                                                                          | 6.0 W                                                    |
| Power supply                                                                          | 210÷250 V AC                                             |
| Power supply CB                                                                       | 186÷254 V DC                                             |
| Dimming mode                                                                          | yes                                                      |
| Temperature range                                                                     | -10-40 °C                                                |
| Material                                                                              | metal                                                    |
| Insulation class                                                                      | 1                                                        |
| IP                                                                                    | IP20                                                     |
| IK                                                                                    | IK05                                                     |
| Warranty                                                                              | 24 months - ST<br>36 months - AT<br>60 months - DATA, CB |
| Material                                                                              | metal                                                    |

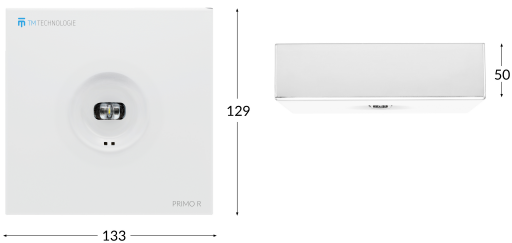