


TM.PRIMO R M1 60 NM DATA 2



Catalog number	TM-PR.M1BDN600M
Application	anti-panic lighting
Duration time	1 h
Operating mode	NM
Version	DD - DATA2
Colour	M – Mirror
Luminous flux	333 lm
Maximum light power (the luminaire can power the light source with a different power)	2.5 W
Active power	* W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Dimming mode	yes
Temperature range	10-35 °C
Material	metal
Insulation class	1
IP	IP20
IK	IK05
Battery	LiFePO4/C 3.2V 1.5Ah

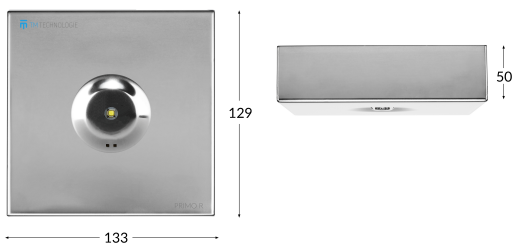