


TM.PRIMO R M1 CBA



Catalog number	TM-PR.M1CBA000M
Application	anti-panic lighting
Duration time	-
Operating mode	-
Version	for central battery
Colour	M – Mirror
Luminous flux	333 lm
Maximum light power (the luminaire can power the light source with a different power)	2.5 W
Active power	6.0 W
Power supply	210+250 V AC
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	-10-40 °C
Material	metal
Insulation class	1
IP	IP20
IK	IK05

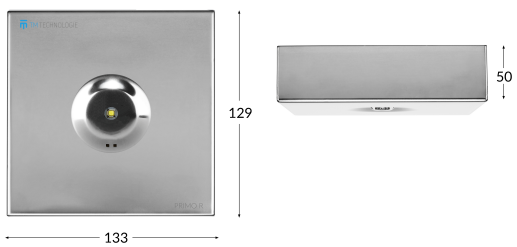